

FSW17P

Flange Spreading Wedge

A Hydraulic Flange Spreading Wedge with a combined hydraulic cylinder and pump unit.

The FSW17P flange spreading wedge can enter a flange joint access gap as small as 6mm and produce a maximum force of 326kN when used in pairs (as recommended) to push the mating faces of flanges apart. The FSW17P can create a gap up to 81mm between flange faces with the stepped blocks fitted facilitating the replacement of gaskets, seal ring's, or other flange face maintenance and testing.

- 100% Load/Pressure tested and certified
- High durability High Quality low Maintenance design
- Tool weight 8.5Kg
- Max Spreading force 163kN (326kN when used in pairs)
- Spreading distance 6mm to 81mm when used with stepped blocks
- Robust Moulded Case for easy transportation and storage




Engineered Energy Equipment

Product Sales | Product Rental | Bespoke Solutions

www.renquip.com

FSW17P

Flange Spreading Wedge

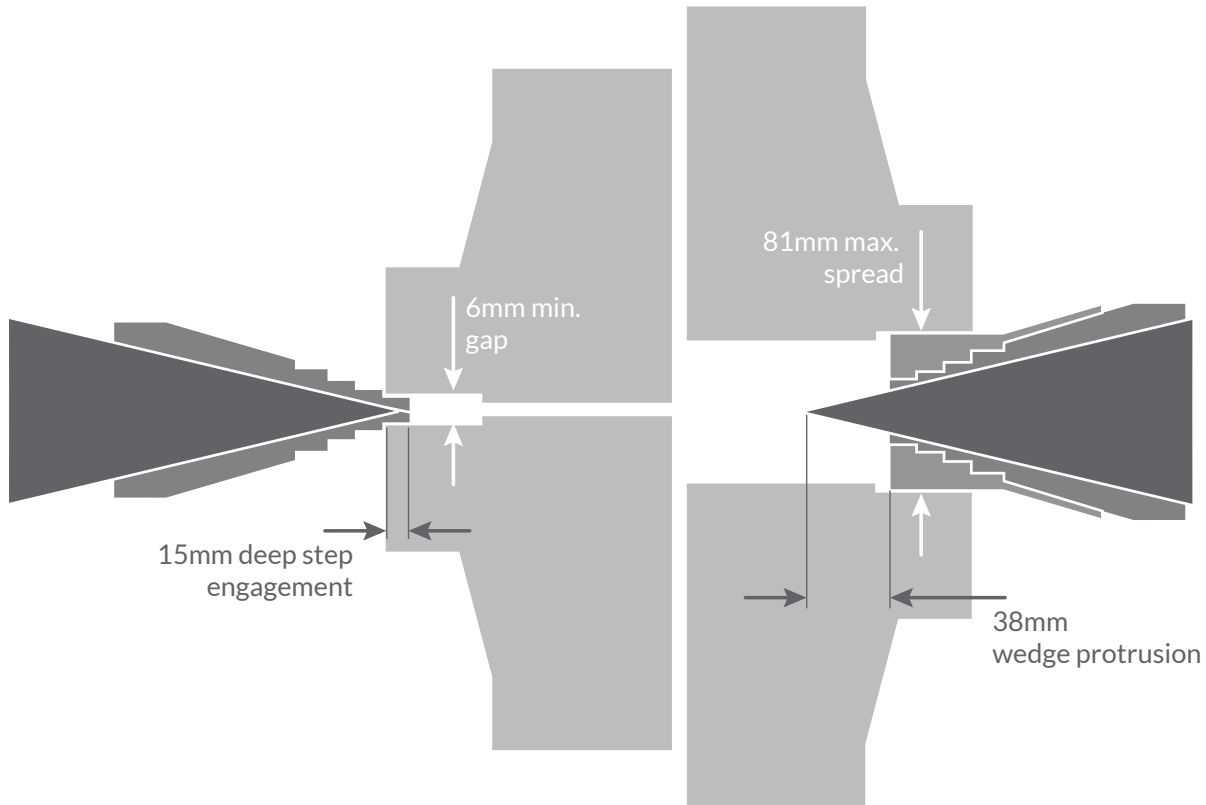

Kit weight: 13Kg

Kit Dims.: 580mm x 340mm x 180mm

Tool Weight: 8.5Kg

Tool Dims.: 76mm x 155mm x 440mm

Product ordering code: FSW17P

Kit Content

- 1 x FSW17P Tool with combined hydraulic cylinder and pump unit
- 1 x Pump Actuating Handle
- 1 x Safety Block
- 1 x Safety Lanyard
- 2x Stepped Blocks with securing screws and allen key
- 1 x Instruction Manual
- 1 x Robust moulded carry case



Engineered Energy Equipment

Product Sales | Product Rental | Bespoke Solutions

www.renquip.com

Unit 1 Dunnottar House, Howe Moss Drive, Dyce, Aberdeen, AB21 0FN
+44(0) 1224001861 | info@renquip.com